

LPG MULTIVALVES HP




description

- Multivalve compatible with the following tanks
- Cylindrical 30° - Cylindrical 90° - Toroidal 0° - Toroidal 30° Toroidal 37°
- Equipped with thermal safety, PRV, manual tap, gas filter, non return valve, cut-off valve, excess flow valve, over pressure device and 80% fillstop safety
- Sensor level and filling valve are available as extra accessories
- Max working pressure: 30 bar
- Working temperature: -20°C + 65°C

product



High-flow capacity LPG multivalves

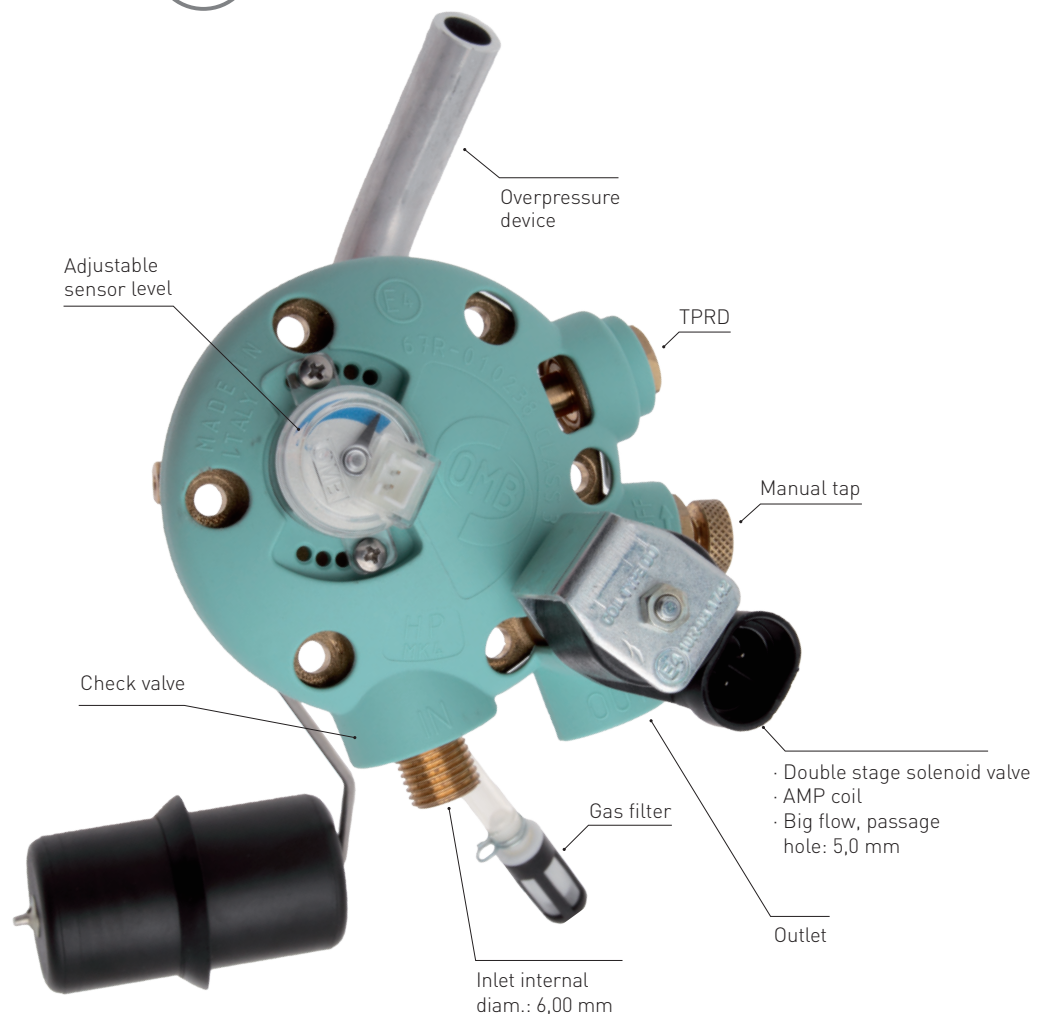

certifications

ECE 67R-01 - CCOE - CERTIFIED